

По вопросам продаж и поддержки обращайтесь:

. Лиматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курган (3522)50-90-47
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Ноябрьск(3496)41-32-12

Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саранск (8342)22-96-24
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35

Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Улан-Удэ (3012)59-97-51
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://abbdrives.nt-rt.ru/> || aei@nt-rt.ru

ПРИВОДЫ ПЕРЕМЕННОГО ТОКА ВЫСОКОВОЛЬТНЫЕ

Техническое описание на преобразователи частоты ACS5000



The ACS5000 medium voltage drive

High power drive for safe operations

The ACS5000 ensures reliable control of applications that require high powers and makes your operations efficient and safe.

ACS5000 medium voltage drives are engineered drives suitable for high power, high speed or special performance applications such as test stands, marine propulsion and thrusters, rolling mills, SAG and ball mills, large pumps, fans and compressors.

The ACS5000 conforms to operations in many fields, but is particularly suited for the chemical, oil, gas and power generation industries due to its robust design. The drive comes with various industry-specific features, which integrate seamlessly with your system and increase the productivity of your processes.

The compact air-cooled ACS5000 is designed to control standard motors, typically used for applications such as pumps, fans, compressors, mixers, mills and conveyors.

The liquid-cooled ACS5000 drives your high power, high speed or special performance applications such as large pumps, fans, extruders and compressors


Get more using less

Our medium voltage drives help you to increase your productivity and profitability. Your processes will use only the energy required to carry out the job and no more. Precise control ensures efficient operation with high uptime and optimized use of raw materials. This will all add up to cost and time savings for you.

Reliable, safe performance you can count on

Through the use of quality components and the integration of special features, our drives ensure high process availability and safety for your business. With well-proven drive technology at the heart, your operations will run smoothly and reliably every day.

Due to the ACS5000's advanced arc resistant design, you can be sure of the highest safety levels in your day to day operations for your personnel and equipment.

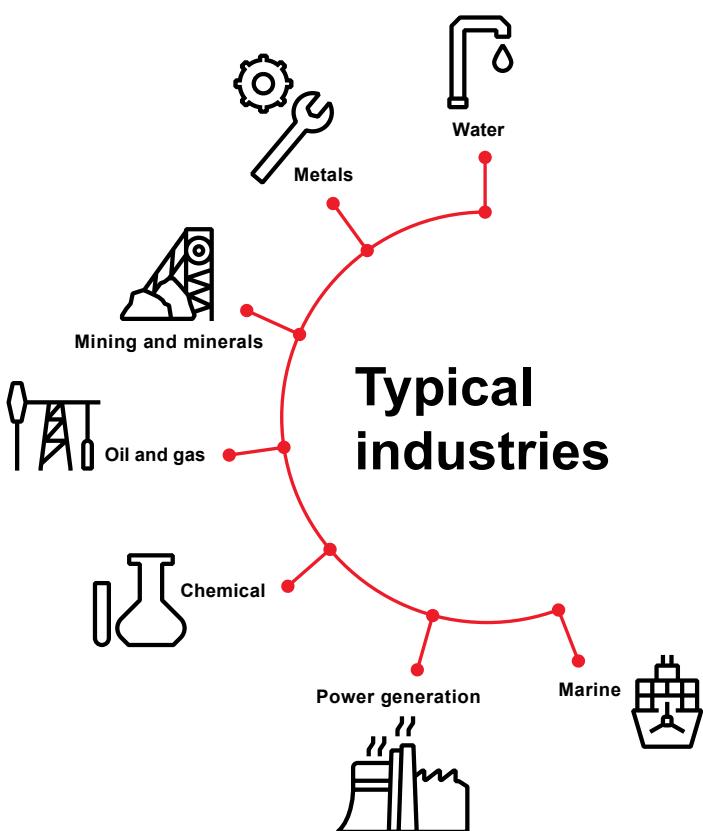

Benefits that add value

Get a drive solution that meets the requirements of your application and ensures high productivity and optimum performance of your operations. Benefit from the built-in expertise of our medium voltage drives and take your business forward with everything working like clockwork.

Energy efficiency

Our medium voltage drives run your motors based on the demands of your process rather than running them at full speed and ensure optimized power consumption and process efficiency. In this way you can save energy and reduce CO₂ emissions.

High power motor control

The ACS5000 is a reliable solution for controlling induction, synchronous and permanent magnet motors and driving your high power applications such as compressors, pumps and fans.


Highest level of personnel safety

Your people and goods are protected from electric arcs thanks to the advanced safety design of the ACS5000. Arcs are detected and eliminated very fast, avoiding production stoppages. Certified functional safety features and a DC grounding switch make your systems safe and reliable.

Robust design

Drive robustness ensures high availability

The robust ACS5000 effortlessly drives your high power applications and controls operations even in harsh environments. Special features such as automatic restart ensure the high availability of your processes.

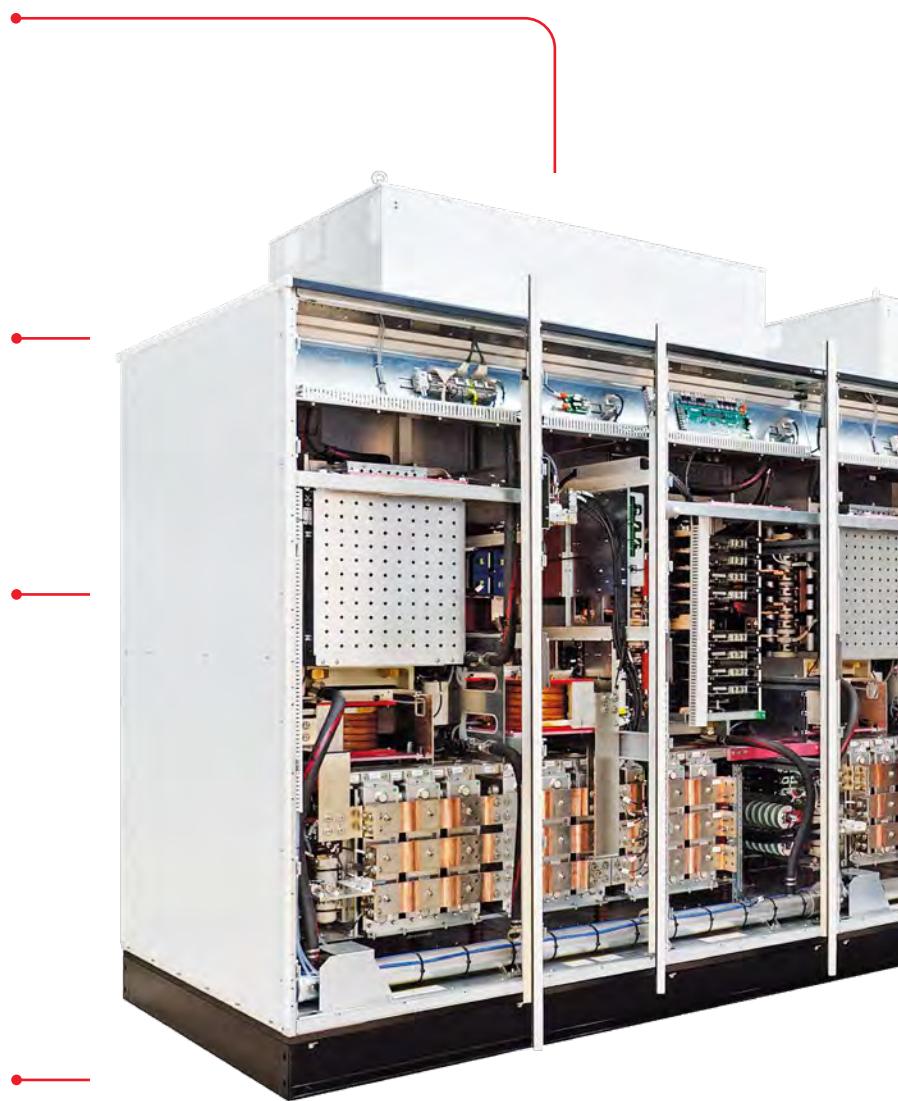



Powerful and reliable

High reliability through well-proven design

Availability of your operations is ensured thanks to the simple, fuseless design. A low parts count and proven components contribute to high uptime and the long lifetime of your drive. Reliability is further increased with the drive's power loss ride-through function so that you are less dependent on network conditions.

Increased productivity due to precise process control

Reduce your energy consumption and increase process efficiency with ABB's direct torque control (DTC). Drive control is immediate and smooth in any conditions, ensuring optimum output and productivity.

Industry-specific solutions for individual needs

Features designed specifically for the oil and gas and power generation industries allow the ACS5000 to adapt perfectly to your application. Choose from a broad range of configurations to drive your standard and high-speed motors, and optimize your system costs.


Serviceability

Easy access to all components ensures that maintenance of the ACS5000 is simple and smooth. In addition to powerful diagnostic tools, you will profit by convenient remote monitoring.

Liquid-cooled, 5 to 36 MW

Thanks to liquid cooling and a sealed cabinet, you can reduce energy and ventilation costs. High reliability is ensured thanks to a minimized part count.

Liquid-cooled ACS5000,
18 MVA, 6.9 kV

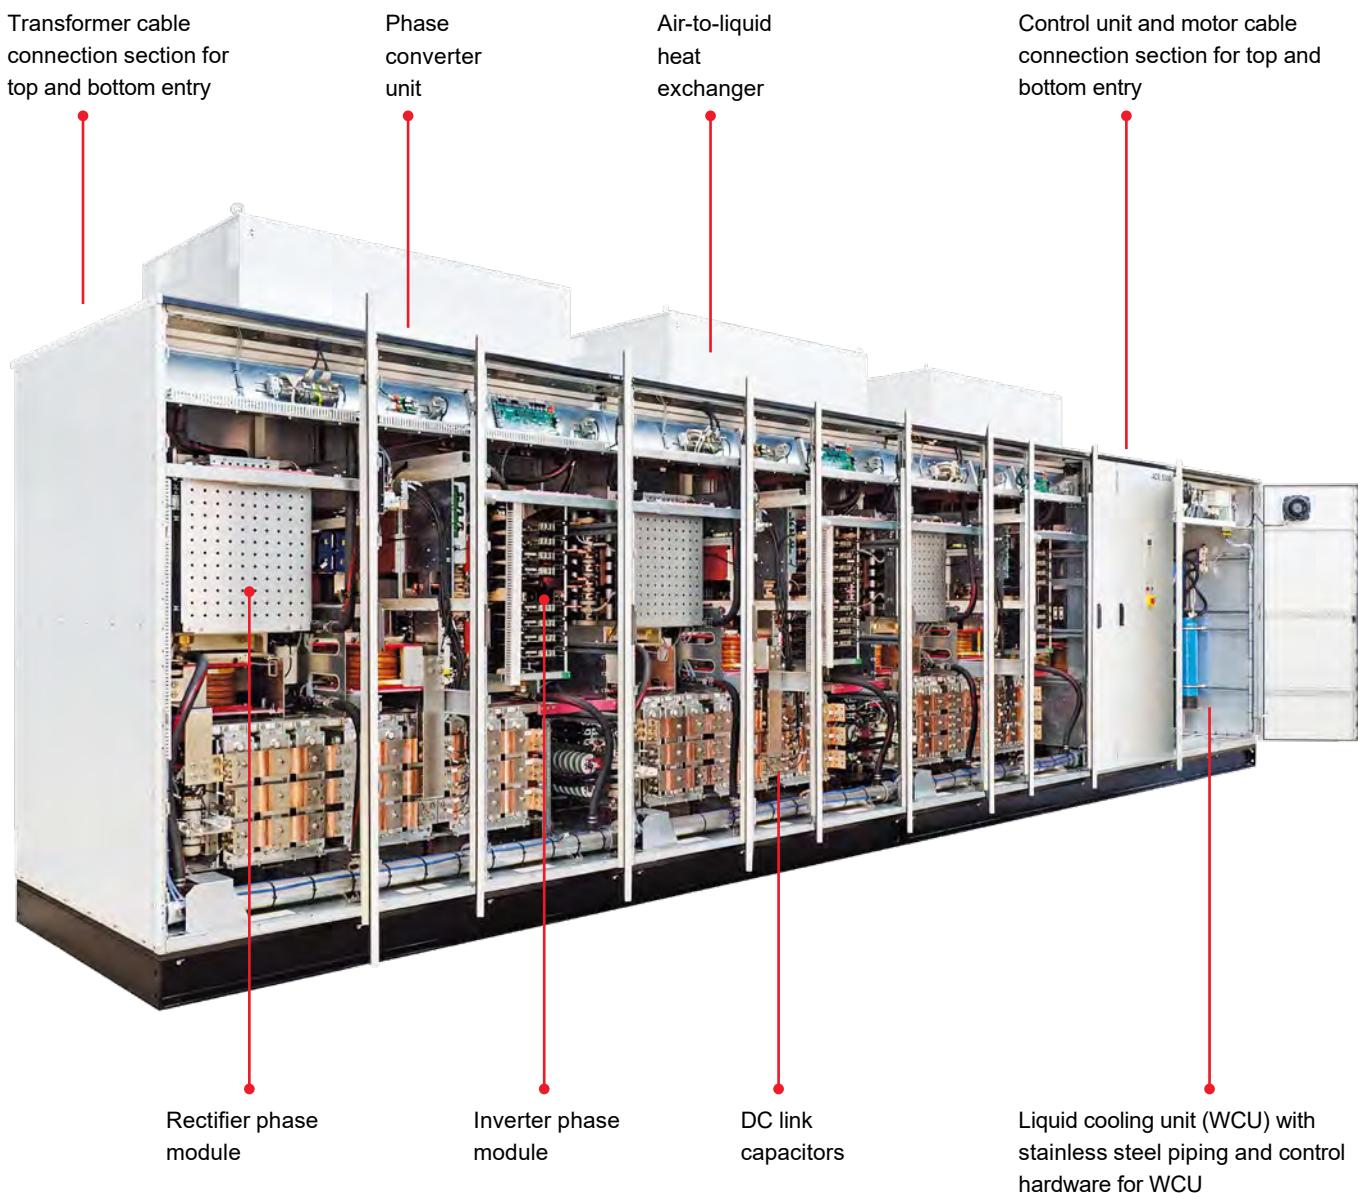

Air-cooled, 2 to 7 MW

Cost optimization and simple system integration is possible with the air-cooled ACS5000.

Air-cooled ACS5000 for operation with integrated input transformer, 7 MVA, 6.9 kV



User-friendly drive control panel for local operation

- Keypad with multi-language display
- Main supply on/off push buttons
- Emergency off push button

Technical data

Input	
Input configuration	36-pulse diode rectifier. Optionally 18-pulse for frames 1 and 2 for liquid-cooled ACS5000.
Input voltage	Input to diode rectifier: 1920 to 1980 V, 3700 to 3960 V Input to integrated transformer: 4.16 to 13.8 kV
Input voltage variation	±10% without derating +20%/-30% with derating
Input frequency	50/60 Hz
Input frequency variation	<5%
Input power factor	>0.96
Input harmonics	IEC 61000-2-4 and IEEE 519 compliant
Auxiliary voltage	Control (optional): 110 V DC, 220 V DC or 110 to 240 V AC 50/60 Hz Auxiliary: 380 to 480 V AC 50/60 Hz, 3-phase 500 to 690 V AC 50/60 Hz, 3-phase (for liquid-cooled only)
Output	
Output power	2000 to 36000 kW (higher on request)
Output voltage	6.0 to 6.9 kV (4.0 to 4.16 kV with derating)
Output frequency	0 to 250 Hz
Motor type	Induction, synchronous and permanent magnet
Efficiency of converter	>98.5%
Mechanical	
Enclosure	Standard air-cooled: IP21 Standard liquid-cooled: IP42 Optional air-cooled: IP42 Optional liquid-cooled: IP54
Cable entry	Top/bottom
Environmental	
Altitude	2000 m.a.s.l. (higher with derating)
Ambient air temperature	+1 to +40 °C (lower and higher with derating)
External cooling liquid temperature	+5 to +32 °C (lower and higher with derating)
Noise	Liquid-cooled: ≤75 dB(A) Air-cooled: ≤85 dB(A)
Cooling type	Air, liquid
Standards	EN, IEC, CE, (optional CSA)

Ratings, types and voltages

ACS5000 air-cooled

Motor data			Converter data					
Nominal ratings ²⁾			Type code ³⁾	Power (kVA)	With external transformer		With integrated transformer	
(kW) ¹⁾	(hp) ¹⁾	(A)			Length (mm)	Weight (kg)	Length (mm)	Weight (kg)
6000 V								
1500	2010	170	ACS5000-060-A01A-x6-010	1800	3300	3000	5700	7700
1800	2410	210	ACS5000-060-A01B-x6-010	2200	3300	3000	5700	7700
2000	2680	240	ACS5000-060-A01C-x6-010	2500	3300	3000	6000	7700
2500	3350	290	ACS5000-060-A01D-x6-010	3000	3300	3000	6000	9200
2800	3750	315	ACS5000-060-A02A-x6-010	3300	3700	4000	6700	10200
3150	4220	355	ACS5000-060-A02B-x6-010	3700	3700	4000	6700	11200
3550	4760	400	ACS5000-060-A02C-x6-010	4200	3700	4000	6700	11200
4000	5360	440	ACS5000-060-A02D-x6-010	4600	3700	4000	6700	11200
4500	6030	510	ACS5000-060-A02E-x6-010	5300	3700	4000	6700	15500
5000	6700	585	ACS5000-060-A02F-x6-010	6000	3700	4000	6700	15500
6600 V								
1600	2140	170	ACS5000-066-A01A-x6-010	1900	3300	3000	5700	7700
2000	2680	210	ACS5000-066-A01B-x6-010	2400	3300	3000	6000	7700
2250	3020	240	ACS5000-066-A01C-x6-010	2800	3300	3000	6000	9200
2500	3350	290	ACS5000-066-A01D-x6-010	3300	3300	3000	6000	9200
2800	3750	315	ACS5000-066-A02A-x6-010	3600	3700	4000	6700	10200
3150	4220	355	ACS5000-066-A02B-x6-010	4100	3700	4000	6700	11200
3550	4760	400	ACS5000-066-A02C-x6-010	4600	3700	4000	6700	11200
4000	5360	440	ACS5000-066-A02D-x6-010	5000	3700	4000	6700	15500
4500	6030	510	ACS5000-066-A02E-x6-010	5800	3700	4000	6700	15500
5600	7500	585	ACS5000-066-A02F-x6-010	6700	3700	4000	6700	15500
6900 V								
1600	2140	170	ACS5000-069-A01A-x6-010	2000	3300	3000	5700	7700
2000	2680	210	ACS5000-069-A01B-x6-010	2500	3300	3000	6000	7700
2250	3020	240	ACS5000-069-A01C-x6-010	2900	3300	3000	6000	9200
2800	3750	290	ACS5000-069-A01D-x6-010	3500	3300	3000	6300	9200
3150	4220	315	ACS5000-069-A02A-x6-010	3700	3700	4000	6700	10200
3550	4760	355	ACS5000-069-A02B-x6-010	4200	3700	4000	6700	11200
4000	5360	400	ACS5000-069-A02C-x6-010	4800	3700	4000	6700	11200
4500	6030	440	ACS5000-069-A02D-x6-010	5200	3700	4000	6700	15500
5000	6700	510	ACS5000-069-A02E-x6-010	6100	3700	4000	6700	15500
6000	8040	585	ACS5000-069-A02F-x6-010	7000	3700	4000	6700	15500

¹⁾ Indicative information referring to typical 4-pole induction motor under nominal supply voltage conditions.

Dimensions:

• **height**

- 360 mm cabinet height
- 815 mm including cooling fans
- 935 mm including redundant cooling fans

• **depth**

- 100 mm
- 300 mm for integrated transformer with power >3150 kVA

²⁾ Nominal rating for no-overload operation

³⁾ „x“ indicates the different input transformer configurations

E – for external transformer

J – for integrated transformer

Ratings, types and voltages

ACS5000 liquid-cooled

Motor data			Converter data					
Nominal ratings ²⁾			Type code ³⁾	Power (kVA)	With external transformer		With combined transformer ⁴⁾	
(kW) ¹⁾	(hp) ¹⁾	(A)			Length (mm)	Weight (kg)	Length (mm)	Weight (kg)
6000 V								
6830	9150	670	ACS5000-060-W01A-xy-010	7000	7130	6800	8530	8650
8480	11360	840	ACS5000-060-W01B-xy-010	8700	7130	6800	8530	8650
10140	13590	1000	ACS5000-060-W01C-xy-010	10400	7130	6800	8530	8650
11154	14949	1100	ACS5000-060-W01D-xy-010	11440	7130	6800	8530	8650
12680	16990	1250	ACS5000-060-W02A-xy-010	13000	9130	9700	9730	10450
15210	20380	1500	ACS5000-060-W02B-xy-010	15600	9130	9700	9730	10450
17750	23790	1750	ACS5000-060-W03A-E6-010	18200	13430	12200	n.a.	n.a.
20280	27180	2000	ACS5000-060-W03B-E6-010	20800	13430	12200	n.a.	n.a.
22330	30000	2200	ACS5000-060-W03C-E6-010	22900	13430	12200	n.a.	n.a.
23300	31220	2300	ACS5000-060-W04A-E6-010	23900	15830	16500	n.a.	n.a.
25350	33970	2500	ACS5000-060-W04B-E6-010	26000	15830	16500	n.a.	n.a.
30420	40760	3000	ACS5000-060-W04C-E6-010	31200	15830	16500	n.a.	n.a.
6600 V								
7510	10060	670	ACS5000-066-W01A-xy-010	7700	7130	6800	8530	8650
9360	12540	840	ACS5000-066-W01B-xy-010	9600	7130	6800	8530	8650
11120	14900	1000	ACS5000-066-W01C-xy-010	11400	7130	6800	8530	8650
12232	16390	1100	ACS5000-066-W01D-xy-010	12540	7130	6800	8530	8650
13940	18680	1250	ACS5000-066-W02A-xy-010	14300	9130	9700	9730	10450
16670	22340	1500	ACS5000-066-W02B-xy-010	17100	9130	9700	9730	10450
19500	26130	1750	ACS5000-066-W03A-E6-010	20000	13430	12200	n.a.	n.a.
22330	29920	2000	ACS5000-066-W03B-E6-010	22900	13430	12200	n.a.	n.a.
24570	32950	2200	ACS5000-066-W03C-E6-010	25200	13430	12200	n.a.	n.a.
25640	34360	2300	ACS5000-066-W04A-E6-010	26300	15830	16500	n.a.	n.a.
27890	37370	2500	ACS5000-066-W04B-E6-010	28600	15830	16500	n.a.	n.a.
33440	44810	3000	ACS5000-066-W04C-E6-010	34300	15830	16500	n.a.	n.a.
6900 V								
7800	10450	670	ACS5000-069-W01A-xy-010	8000	7130	6800	8530	8650
9750	13070	840	ACS5000-069-W01B-xy-010	10000	7130	6800	8530	8650
11700	15680	1000	ACS5000-069-W01C-xy-010	12000	7130	6800	8530	8650
12870	17248	1100	ACS5000-069-W01D-xy-010	13200	7130	6800	8530	8650
14530	19470	1250	ACS5000-069-W02A-xy-010	14900	9130	9700	9730	10450
17450	23380	1500	ACS5000-069-W02B-xy-010	17900	9130	9700	9730	10450
20380	27310	1750	ACS5000-069-W03A-E6-010	20900	13430	12200	n.a.	n.a.
23300	31220	2000	ACS5000-069-W03B-E6-010	23900	13430	12200	n.a.	n.a.
25640	34380	2200	ACS5000-069-W03C-E6-010	26300	13430	12200	n.a.	n.a.
26810	35930	2300	ACS5000-069-W04A-E6-010	27500	15830	16500	n.a.	n.a.
29150	39060	2500	ACS5000-069-W04B-E6-010	29900	15830	16500	n.a.	n.a.
35000	46900	3000	ACS5000-069-W04C-E6-010	35900	15830	16500	n.a.	n.a.

¹⁾ Indicative information referring to typical 4-pole induction motor under nominal supply voltage conditions.

²⁾ Nominal rating for no-overload operation

³⁾ ,x^t indicates the different converter types
E – for external transformer

J – for integrated transformer

,y^t indicates different rectifier types:

- 3 - 8-pulse

- 6 - 6-pulse

Note: C3 is not available.

⁴⁾ In combined transformer configuration the cooling system of the input transformer is connected to the cooling liquid system of the converter and the system has a common cooling liquid pump in the converter. The length and weight do not include the input transformer part.

The combined transformer is available only for a 36-pulse rectifier.

Dimensions:

- **eight**

- 363 mm cabinet height
- 752 mm including cooling units
- 774 mm including cooling units and mechanical design for offshore applications

- **Depth**

- 600 mm


NETA-21

NETA-21 connects the drive to the cloud via the Internet or local Ethernet network.

- The module comes with a built-in web server and requires no Flash/Java plugins
- In the absence of a customer local area network, it can be connected via a mobile network router (either Ethernet or USB network adapter)
- One module can be connected to several drives at the same time

NETA-21	Ordering code	Description
	3AUA0000094517	2 x panel bus interface
		max. 9 drives
		2 x Ethernet interface
		SD memory card

Customers can configure powertrains and customize the digital service plan

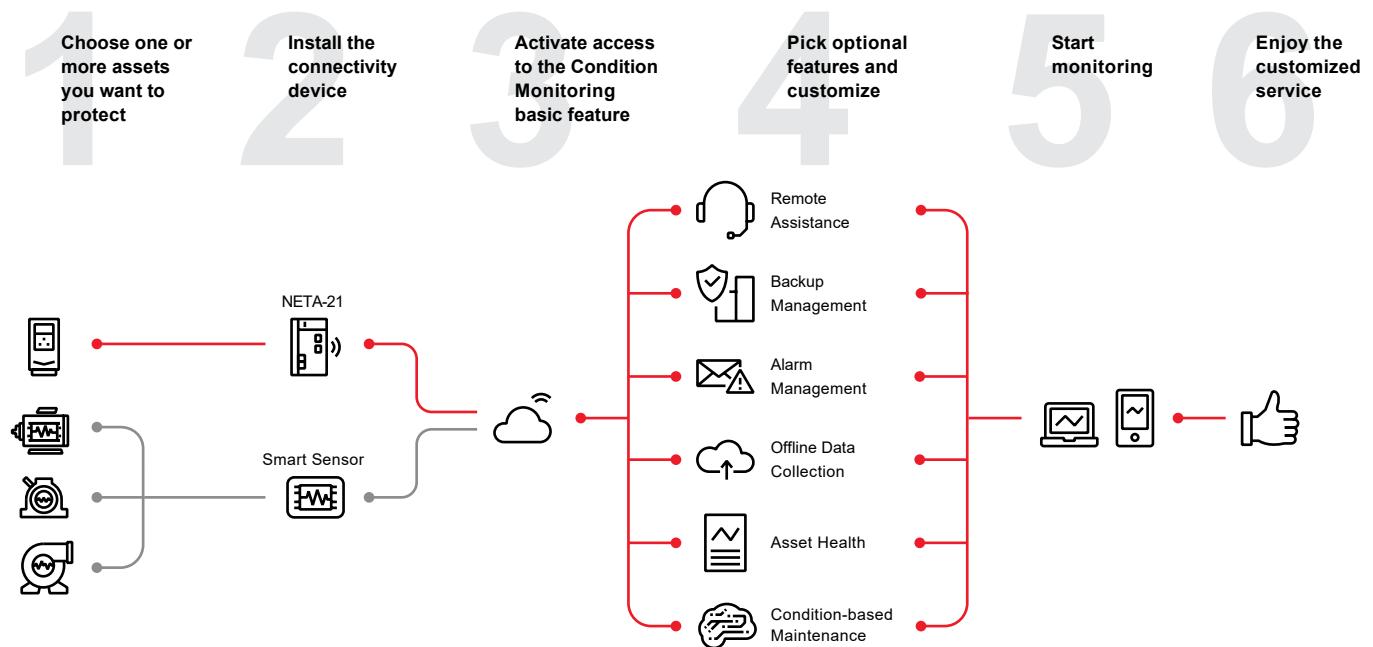

По вопросам продаж и поддержки обращайтесь:

. лматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курган (3522)50-90-47
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Ноябрьск(3496)41-32-12

Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Петrozаводск (8142)55-98-37
Псков (8112)59-10-37
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саранск (8342)22-96-24
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35

Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Улан-Удэ (3012)59-97-51
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://abbdrives.nt-rt.ru/> || aei@nt-rt.ru